



REV.	DATE	E.C.O. No.	CONF.

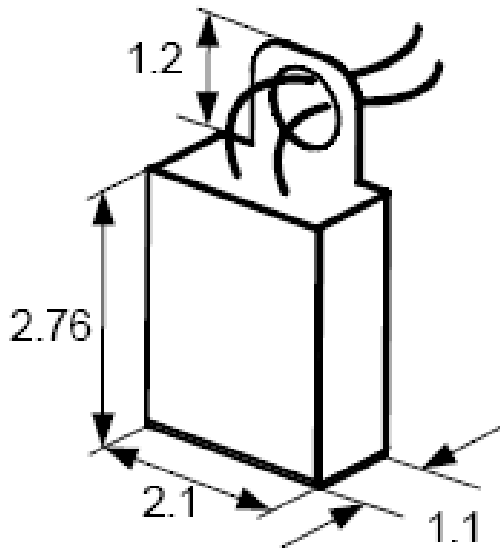

EMDC300  
D-Buzz Choke

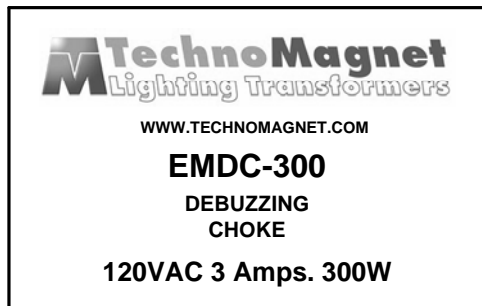

Notes:

- Operational Voltage: 120 VAC
- Maximum Current: 3 Amps
- Maximum Load Wattage: 300W
- DC resistance: 0.28 Ohm.
- AC Resistance: 3.2 Ohm.
- The actual debuzzing choke is encapsulated in the enclosure
- Enclosure temperature does not exceed 70°C at 40°C ambient, fully loaded
- The leads are 4" solid wire in sleeving
- The choke uses a Class B (130°C) insulation system.
- The secure hole sized for 3/8 inch (1/2" KO) clamp cable connector.
- The enclosure is black powder coated
- The label contains Technomagnet catalog number and electrical rating.

<b>TechnoMagnet LTD.</b> Interactive Lighting Servers				15414 Cabrito Road Unit A Van Nuys, CA 91406					
						PAGE _____			
NAME		DATE		SING.		OF _____		SCALE no scale	
DRW.		CHK.		APV.		PART No. <b>EMCD 300</b>		TOLERANCE $\pm$	
REV. <b>A</b>		TITLE <b>D-Buzz Choke</b>		DIA TOL $\pm$		REV. <b>A</b>		TITLE <b>D-Buzz Choke</b>	