


**NOTES:**

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.5A
3. Enclosure Temperature does not exceed 65°C in a 40°C ambient, fully loaded.
4. The actual transformer 150VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input leads are 18 AWG output leads are 12 AWG. Lead insulation is 105°C.
7. The transformer uses a class B (130°C) insulation system.
8. The transformer has a manual reset thermal 2A circuit breaker on the primary side, or a 20A circuit breaker on the secondary side indicated by the marked check box on the label.
9. Wiring compartment has 2 knockouts sized for 3/4 inch screw cable connectors.
10. The wiring compartment cover hinged with rivets and opens vertically from bottom to top.
11. The enclosure, available in black powder coated or stainless steel is NEMA 3R rated.
12. The Transformer is UL listed. UL file number: E194005.
13. The label contains Technomagnet's catalog number and electrical rating.
14. The boost tap option is indicated by the marked check box on the label.

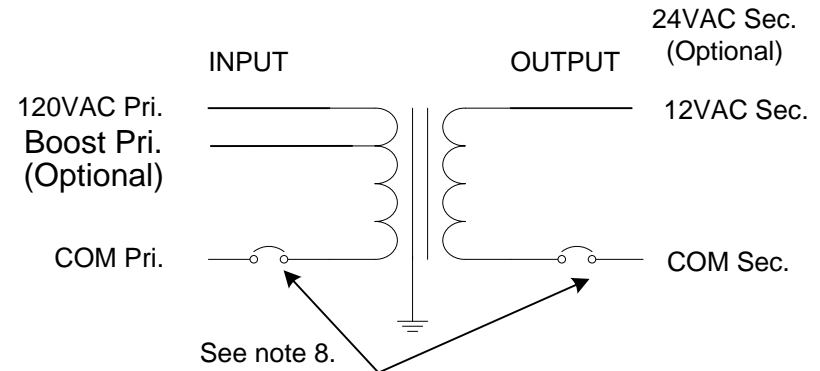

**TechnoMagnet**  
Lighting Transformers

LOW VOLTAGE OUTDOOR LIGHTING TRANSFORMER

**C-150**

<b>PRIMARY</b> 120V - 60Hz 1.36 A	<b>SECONDARY</b> 11.8V OPEN CIRCUIT VOLTS: 12.5V
---	--

**MAXIMUM 150W**

READ THE INSTRUCTION ENCLOSED WITH THIS TRANSFORMER

 LISTED PRODUCT IDENTITY 57TB	<input type="checkbox"/> Terminal Block
	<input type="checkbox"/> Primary <input type="checkbox"/> 12V
	<input type="checkbox"/> Secondary <input type="checkbox"/> 24V
	<input type="checkbox"/> Boost tap

ENCLOSURE TYPE  
3R OUTDOOR

Table 1.

Output Volts	
120AC	Boost
11.8	12.8

		15414 Cabrito Road Unit A Van Nuys, CA 91406	
Interactive Lighting Servers		PAGE ____	SCALE no scale
DRW.	NAME	DATE	SING.
CHK.			
APV.			
PART No. ODC - 150 REV. A		OF ____	TOLERANCE ±
DESCRIPTION: Compact outdoor 12V 150VA Low voltage Transformer.			